

20263

TÜV NORD

3 Tiger Neo 3.0

50%

N TOPCon

IEC 61215-2:2021 MQT 06.1

STC

1000W/m²

AM1.5

25°C

A+A+A+

|   |                 | Pmax  |
|---|-----------------|-------|
| 1 | BC              | 650+W |
| 2 |                 | 630+W |
| 3 | 3 Tiger Neo 3.0 | 650+W |



Tiger Neo

1


Tiger Neo 3.0

|   | BC      |         | Tiger Neo 3.0 |
|---|---------|---------|---------------|
| 1 | -34.14% | -34.42% | -17.50%       |
| 2 | -47.27% | -48.63% | -24.32%       |

3

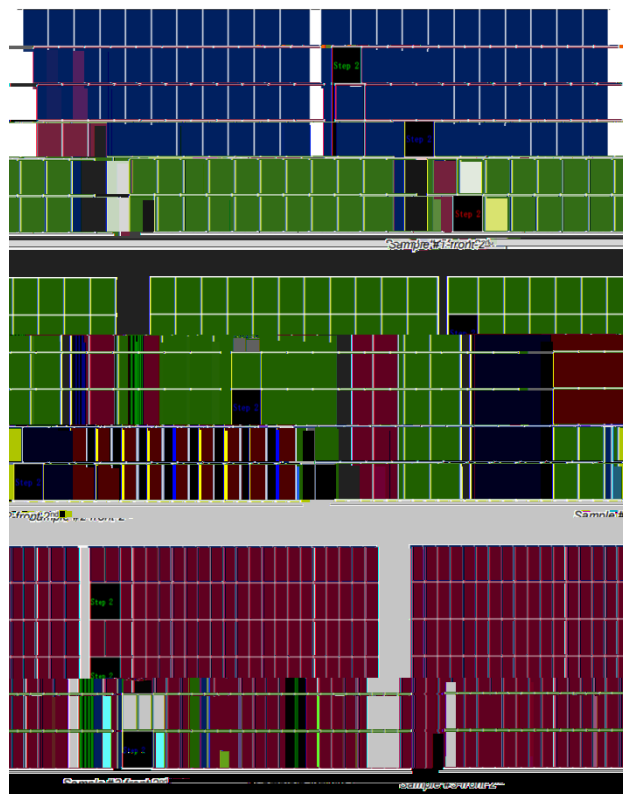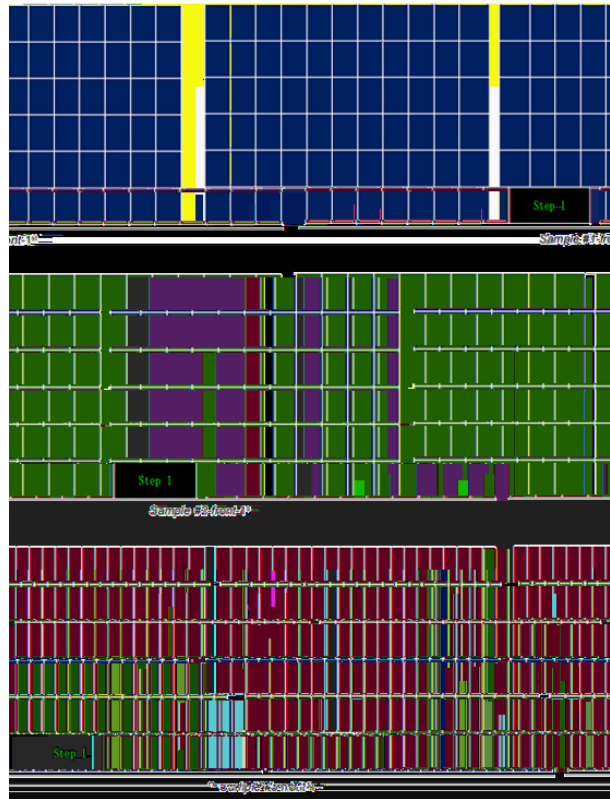

Neo 3.0      17.50%      BC      49.3%      34%      Tiger

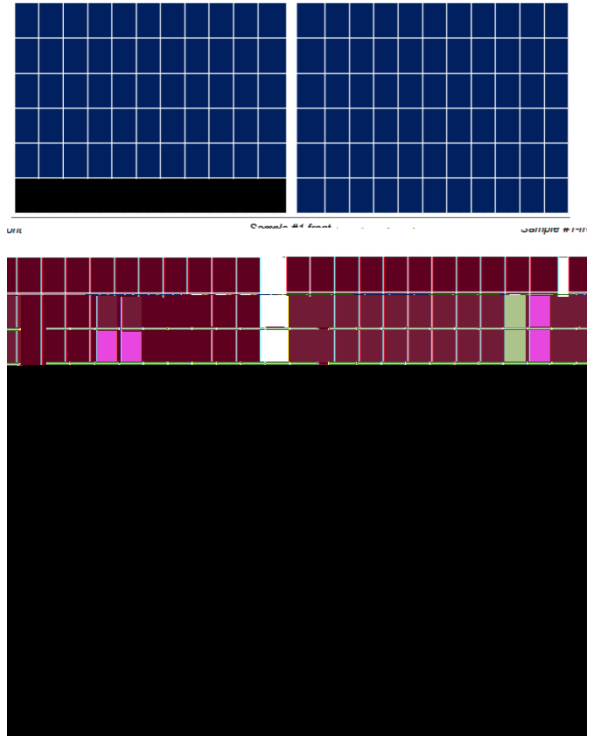


Tiger Neo 3.0      BC      17.5%      BC      48.8%      34%      16.7%

3 25%

25% 100%


|      | BC     |        | Tiger Neo 3.0 |
|------|--------|--------|---------------|
| 25%  | -13.8% | -15.2% | -7.2%         |
| 50%  | -34.2% | -34.4% | -17.7%        |
| 75%  | -34.3% | -34.5% | -30.1%        |
| 100% | -34.3% | -34.5% | -34.6%        |


25% 25%-75% Tiger Neo 3.0 7.2% BC  
50% 75%

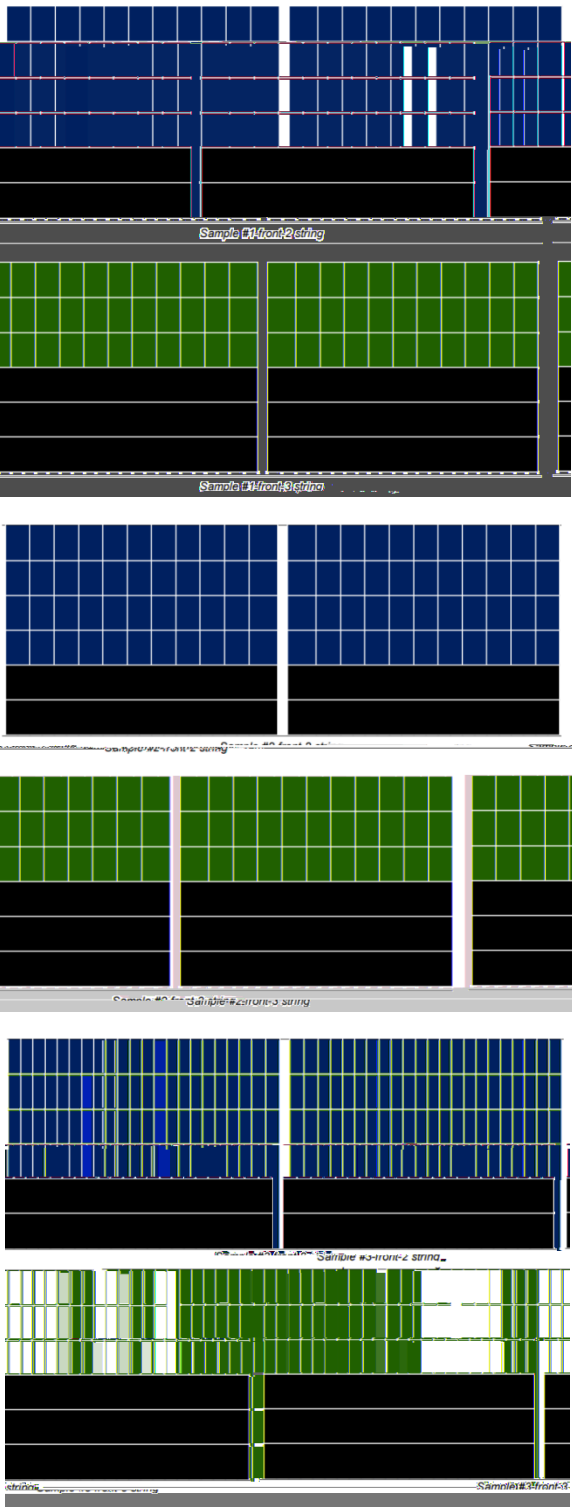

|    |     |        |        |               |        |
|----|-----|--------|--------|---------------|--------|
| BC | BC  | -68.4% | -68.7% | Tiger Neo 3.0 | -63.5% |
| BC | 4.9 |        |        | 15.5%         |        |

|      | BC     |        | Tiger Neo 3.0 |
|------|--------|--------|---------------|
| 25%  | -50.2% | -50.1% | -50.1%        |
| 50%  | -49.9% | -50.1% | -50.1%        |
| 75%  | -49.8% | -49.9% | -49.8%        |
| 100% | -49.1% | -49.4% | -49.4%        |

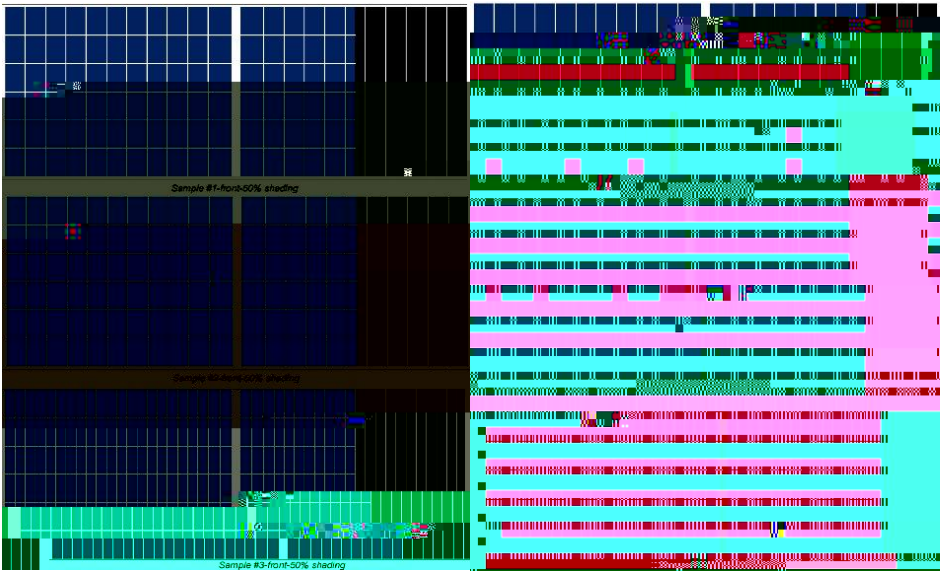

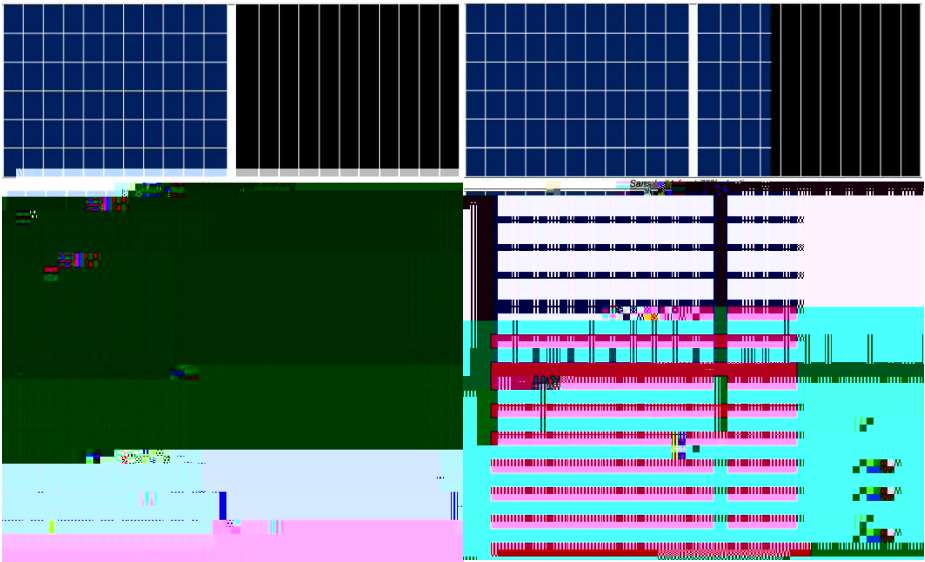

Tiger Neo 3.0

25% 50%

Tiger Neo 3.0

Tiger Neo 3.0

|     | Tiger Neo 3.0 |  |
|-----|---------------|--|
|     | 49.3%         |  |
|     | 48.8%         |  |
| 25% | 47.8%         |  |
| 50% | 48.2%         |  |
|     | 7.2%          |  |

